
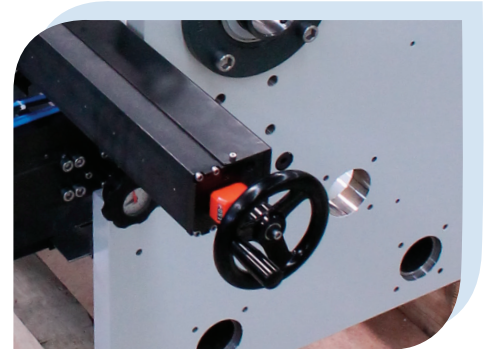


# ENDURANCE SERIES COATING APPLICATORS

## Hot melt coating applicators with interchangeable nozzles

Bring in total flexibility to your coating process with Endurance Series applicators. Featuring interchangeable nozzles, you can easily transform your applicator from fixed to adjustable width, and switch from continuous to off-roll applications

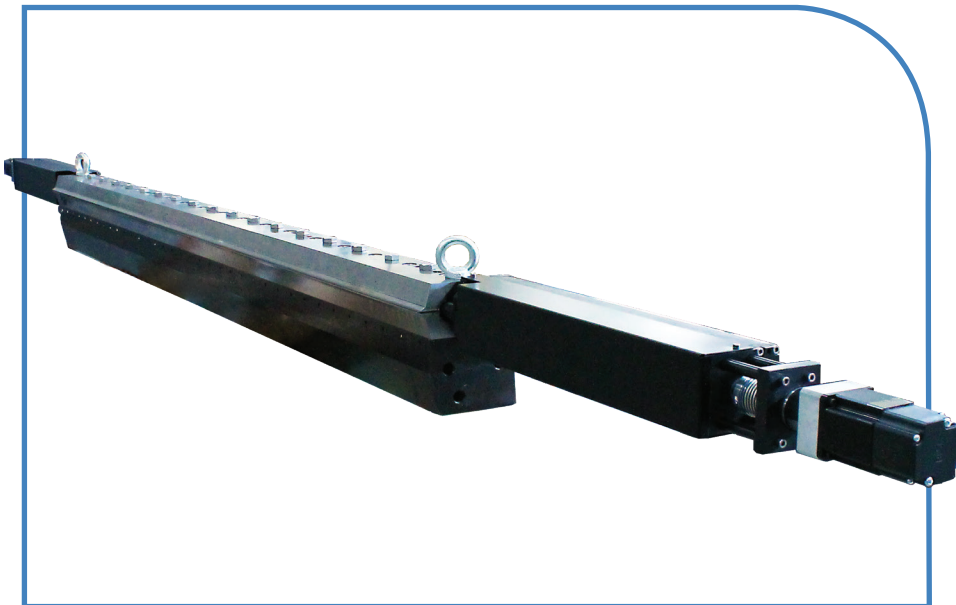

### Width Adjustment Options

EA Adjustable Width Applicators feature manual, motorized or automatic width regulation systems




### High Precision Adjustments

Regulation systems on the back side of the nozzle allow to adjust and adapt it to the exact surface of the back up roll.

## Key highlights of Endurance Series applicators include:

- **Adapt to your line requirements.** Endurance Series includes EP fixed width version and EA adjustable width version that can feature manual, motorized, or automatic width regulation systems.
- **Achieve a homogeneous application throughout the whole coating width for any grammage.** All applicators include a fine-tune regulation system to accurately adapt the nozzle to the surface of the back up roll.

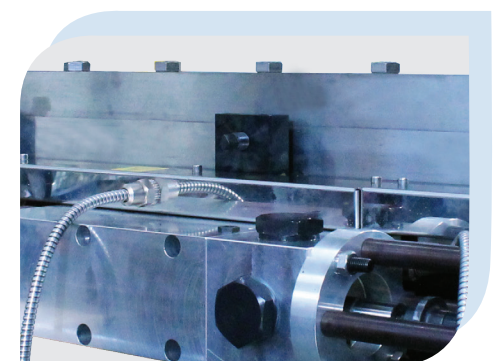

Ensure cleaner applications and a precise adhesive cut with an integrated filter and dispensing module. Available as an option.

## ACCESSORIES & UPGRADES

Valco Melton offers a wide range of accessories and upgrade options to adapt to your own specific production line requirements.

### Adhesive Dosing Upgrade Options


Improve adhesive dosing and achieve a better control of dosing consistency, even during machine ramp up/down. Depending on specific needs, options can vary from incorporating a pressure transducer, to flow metering systems or pumping stations.

### Brackets

Utilizing the appropriate mounting bracket guarantees a correct adhesive penetration, coat-weight, and easy pattern adjustments.

Against-roll mount assemblies ensure that the coating head is accurately and consistently presented against the substrate and back up roll for minimal job-to-job alterations.

Off-roll mount assemblies allow for changes in substrate thickness. By maintaining a stable tension at the coating area, this bracket keeps the substrate in continuous contact with the die.

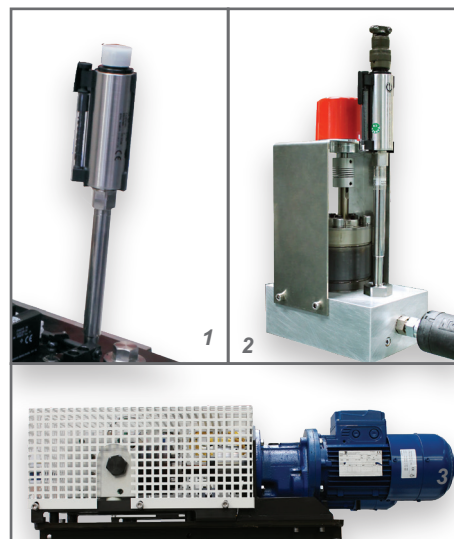

1. Pressure Transducer
2. Flow Metering System
3. EB Pumping Station

## Technical Specifications

Endurance Coating Applicator	
Standard versions	EA - Adjustable Width Applicators
Width Adjustment Options	Manual / Motorized / Automatic
Working Positions	Against-Roll / Off-Roll
Adhesive Input Options	Direct / With Filter / With Filter & Module
Temperature Control	NI-120 / PT-100 / FEKO
Max Coating Width	Up to 3200 mm
Max Operating Temperature	240° C (464° F)
Max Operating Pressure	100 bar
Operating Speed	200 m/min
Coating Thicknes Range*	20 - 200 gr/sqm
Max Electrical Consumption	Body Gun: 2000 W every 400 mm

For more information, visit [valcomelton.com](http://valcomelton.com) or contact your local representative

World Headquarters: Cincinnati, OH, USA • Tel: +1 513 874 6550

Europe Headquarters: Orkoien, Spain • Tel: +34 948 321 580



Locations

[inquiry@valcomelton.com](mailto:inquiry@valcomelton.com)

KCB 000179 EN 003