


## FLEXWRAPP SERIES

## Adjustable Coating Width up to 1300 mm

For continuous applications that require frequent width changes and maximum precision to reduce adhesive usage, the FlexWrapp Coating Gun Series is the ideal choice. The latest FlexWrapp series offers enhanced reliability and has been specifically engineered to meet the demanding needs of the woodworking, PVC and aluminium environments.



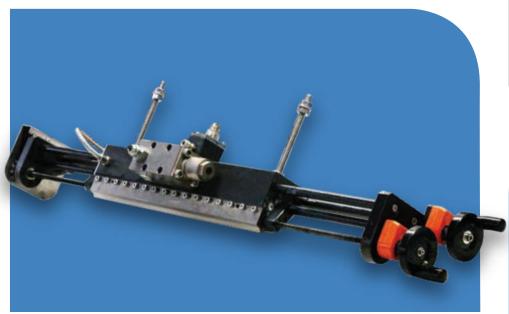


High flow valve



- Coating width can be easily adjusted up to 1300 mm
- Maximum durability for minimized labor and maintenance costs
- Optional Teflon® coating prevents build-up for an easy-to-clean surface
- Easy to use width adjustment system, bilateral, independent, and with just one opearational side

Approach band system with back up guide ensures uniform contact of the wrap against the coating head and moves out when the machine stops to prevent burns and damage on the substrate.



Optional high capacity filter



Precise adjustments allow Valco Melton's FlexWrapp Series to offer a higher quality application, making it ideal for use in woodworking, PVC and aluminum profile wrapping applications.

A range of system functions including automatic application width and grammage control can be accessed through a touch screen panel, simplifying the operator's programming tasks, and eliminating product loss and downtime associated with incorrect coat weight adjustments.

All FlexWrapp series are equipped with independent right and left regulation (manual or with stepper motors) and width adjustments from 350 mm up to 1300 mm.



Manual regulation with one operational side

Bilateral manual width regulation

Automatic adjustable width through independent stepper motors

## **Technical Specifications**

Sigma Nozzle	
Max. Coating Lenght	350   550   850   1100   1300
Max. Operating Speed	70 m/min
Add- On	30 to 130 gsm
Temperature Control	PT - 100/NI - 120/FEKO
Max. Operating Temperature	240°C
Max. Operating Pressure	100 bar
Features	Motorized width linked to grammage control

For more information, visit **valcomelton.com** or contact your local representative World Headquarters: Cincinnati, OH, USA • Tel: +1 513 874 6550 Europe Headquearters: Orkoien, Spain • Tel: +34 948 321 580



